

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number  
**WO 2005/082628 A1**

- (51) International Patent Classification<sup>7</sup>: **B41J 2/045**, 2/055, H01L 41/09
- (21) International Application Number:  
PCT/JP2005/003443
- (22) International Filing Date: 23 February 2005 (23.02.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2004-057044 2 March 2004 (02.03.2004) JP
- (71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **YAMAGUCHI, Kiyoshi** [JP/JP]; 28-7-3-207, Utsukushigaoka 5-chome, Aoba-ku, Yokohama-shi, Kanagawa, 2250002 (JP). **SASAKI, Takafumi** [JP/JP]; 5-8-401, Saiwaicho, Atsugi-shi, Kanagawa, 2430012 (JP).
- (74) Agent: **ITO, Tadahiko**; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo 1506032 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIQUID DROP DISCHARGE HEAD, LIQUID DROP DISCHARGE DEVICE, AND IMAGE FORMING DEVICE

(57) Abstract: A liquid drop discharge head includes a nozzle configured to discharge a liquid drop by using a piezoelectric element. Lead ingredients are not included in the piezoelectric element.

WO 2005/082628 A1

-1-

## DESCRIPTION

LIQUID DROP DISCHARGE HEAD, LIQUID DROP  
DISCHARGE DEVICE, AND IMAGE FORMING DEVICE

5

TECHNICAL FIELD

The present invention relates to liquid drop  
discharge heads, liquid drop discharge devices, and  
10 image forming devices.

BACKGROUND ART

An ink jet recording device having a liquid  
15 drop discharge device including a liquid drop  
discharge head is known as an image forming device  
such as a printer, facsimile, copier, and  
multifunction device of the printer, facsimile, and  
copier.

20 In the ink jet recording device, a liquid  
drop of a recording liquid is jetted from a recording  
head to a recorded medium such as a paper, an OHP  
(Overhead Projector) film, a recording medium or a  
recording paper, so that image forming such as  
25 recording, printing, or copying can be performed. It

-2-

is possible to record a high precision image with high speed by the ink jet recording device on the recording medium. In addition, running cost is cheap and noise is small in the ink jet recording device.

5 Furthermore, it is easy to record a color image by using a lot of kinds of colors, in the ink jet recording device.

As the inkjet head used for such an inkjet recording device, an inkjet head having a liquid room  
10 such as a pressing room, pressing liquid room, pressure room, a vibration room, and a piezoelectric element is known. The liquid room is connected to the nozzle for discharging the liquid drop. The vibration plate forms a part of a side surface of the  
15 liquid room. The piezoelectric element functions as an electrical-mechanical conversion element which deforms the vibration plate.

As disclosed in Japanese Patent Laid-Open Application Publications No. 2003-94652 and No. 2003-  
20 237065 and Japanese Patent No. 3178414, a PZT group formed by adding a small amount of an additive such as niobium oxide to a solid solution of lead zirconate ( $\text{PbZrO}_3$ ) and lead titanate ( $\text{PbTiO}_3$ ), is used as a piezoelectric material forming a piezoelectric  
25 element used for such an inkjet recording device. In

addition, a solid solution generally called "ternary system" and formed by dissolving a lead group compound perovskite such as  $\text{Pb}(\text{Mg}_{1/3}\text{Nb}_{2/3})\text{O}_3$  into the PZT is also used as the piezoelectric material forming the piezoelectric element used for such an inkjet recording device.

Since the Curie temperature of the PZT is high ( $360^\circ\text{C}$ ), the PZT may not be influenced by heat in a head manufacturing process. In addition, since the sintering temperature of the PZT is relatively low ( $900$  through  $1200^\circ\text{C}$ ), a low cost metal can be used for an internal layer electrode.

However, the above-discussed piezoelectric ceramic material includes lead oxide, which is not preferable for an ecological system, as approximately 70% of the whole weight. Therefore, in a case where the above-discussed piezoelectric ceramic material is thrown away, it is expected that a lead compound will be diffused into a natural environment due to acid precipitation and thereby a bad influence to a human body or the ecological system may be expected.

Furthermore, there is the following problem that is peculiar to the ink jet recording device using the piezoelectric element. That is, since the ink jet printer is cheaper than other image forming

type printers, a large number of the ink jet printers are consumed for general individual users. In a case where the piezoelectric element including lead is used for such a cheap printer, a ratio of cost for  
5 collecting lead against benefit obtained by selling the printer is high. In addition, since the head part is mechanically positioned with an extremely high precision, the cost for dismantling of the printer is high. Because of this, a manufacturer's  
10 load for the collection of the lead is extremely high.

#### DISCLOSURE OF THE INVENTION

Accordingly, it is a general object of the  
15 present invention to provide a novel and useful liquid drop discharge head, liquid drop discharge device, and image forming device.

Another and more specific object of the present invention is to provide a liquid drop  
20 discharge head which discharges a liquid drop by using a piezoelectric element not including lead ingredients so that the risk of environmental pollution and dismantling cost can be made low, a liquid drop discharge device having the liquid drop  
25 discharge head, and an image forming device.

The above object of the present invention is achieved by a liquid drop discharge head, including:

a nozzle configured to discharge a liquid drop by using a piezoelectric element;

5            wherein lead ingredients are not included in the piezoelectric element.

The above object of the present invention is also achieved by a liquid drop discharge device, including:

10           a liquid drop discharge head configured to discharge a liquid drop;

             wherein the liquid drop discharge head includes a nozzle configured to discharge the liquid drop by using a piezoelectric element, and

15           lead ingredients are not included in the piezoelectric element.

The above object of the present invention is also achieved by an image forming device configured to form an image on a recording medium by discharging  
20 a liquid drop of recording liquid, including:

a liquid drop discharge head configured to discharge the liquid drop;

             wherein the liquid drop discharge head includes a nozzle configured to discharge the liquid  
25 drop by using a piezoelectric element, and

lead ingredients are not included in the piezoelectric element.

Other objects, features, and advantages of the present invention will become more apparent from  
5 the following detailed description when read in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10 FIG. 1 is a perspective view of the exterior of a liquid drop discharge head of a first embodiment of the present invention;

FIG. 2 is an exploded perspective view of the liquid drop discharge head of the first  
15 embodiment of the present invention;

FIG. 3 is a cross-sectional view of the liquid drop discharge head of the first embodiment of the present invention;

FIG. 4 is a perspective view of a  
20 piezoelectric actuator of the liquid drop discharge head of the first embodiment of the present invention;

FIG. 5 is an enlarged perspective view of parts of the piezoelectric actuator shown in FIG. 4;

25 FIG. 6 is a structural view showing an

-7-

example of a mechanism part of an image forming device including a liquid drop discharge device of the present invention; and

FIG. 7 is a plan view of parts of the image forming device of the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

A description of the present invention and details of drawbacks of the related art are now given, with reference to FIG. 1 through FIG. 7, including embodiments of the present invention. First, the first embodiment of a liquid discharge head of the present invention is discussed with reference to FIG. 1 through FIG. 3. FIG. 1 is a perspective view of the exterior of the liquid drop discharge head. FIG. 2 is an exploded perspective view of the liquid drop discharge head. FIG. 3 is a cross-sectional view of the liquid drop discharge head.

The liquid drop discharge head has a nozzle 1 for discharging a liquid drop, a pressure room 2 connected to the nozzle 1, a vibration plate 3 (not shown) forming a part of a side surface of the pressure room 2, and a piezoelectric element 4 as actuator means such as pressure generation means or



driving means for pressing the liquid in the pressure room 2 via the vibration plate 3. The liquid drop discharge head also has a common liquid room 8 and a supply opening part 9. The common liquid room 8  
5 supplies ink as recording liquid to plural pressure rooms 2 via a liquid supply path 6 and a liquid supply opening 7. The supply opening part 9 supplies the ink from an outside to the common liquid room 8.

Two lines of the nozzles 1 are arranged in  
10 parallel lines on a nozzle plate 11. A plate formed by Ni electro-casting or the like is used for the nozzle plate 11, for example. However, other plate materials can be used as the nozzle plate 11. Each of the pressure rooms 2 is formed in a channel plate  
15 12 made of a silicon substrate, for example. A vibration plate member 13 forming the vibration plate 3 is connected to a back surface side of the channel plate 12.

Under this structure, ink as recording  
20 liquid supplied from the outside to the common liquid room 8 is supplied to plural pressure rooms 2 via the liquid supply path 6 and the liquid supply opening 7. The inside of the pressure room 2 is pressed by deformation of the piezoelectric element 4 via the  
25 vibration plate 3 so that the liquid drop is

discharged from the nozzle 1.

The piezoelectric element 4 is connected on a base 14 so as to correspond to the line of the nozzles 1. More specifically, as shown in FIG. 4 and 5 FIG. 5, the piezoelectric element 4 is formed by making grooves 16 on two piezoelectric members 15 connected on the base 14 in a comb tooth shape so that the grooves 16 correspond to the nozzles 1.

The piezoelectric element 4 is a stacked 10 layer type piezoelectric element formed by reciprocally stacking a piezoelectric layer formed by a piezoelectric material (piezoelectric ceramic) not including lead and an inside electrode layer. The inside electrodes are reciprocally pulled out to an 15 end surface so as to be connected to an end surface electrode (outside part electrode). An FPC 18 for supplying a driving signal is connected to an end surface electrode (outside part electrode) 17 functioning as an individual electrode and other end 20 surface electrode functioning as a common electrode (not shown), via an anisotropic conductive film.

The common liquid room 8 is formed in a frame member 20. A supply opening part 9 is formed in the frame member 20 as outside liquid supply means 25 so that the ink is supplied from the ink cartridge or

-10-

the sub tank. In addition, an opening part 21 is formed in the frame member 20 so that a piezoelectric unit 25 (See FIG. 4) including the piezoelectric element 4, the base 14, and the FPC 18 is received in the opening part 21. Furthermore, a circumferential edge part of the vibration plate member 13 is connected to the frame member 20.

As a piezoelectric material of the piezoelectric element 4 at this head, a piezoelectric material not including a lead ingredient is used. More specifically, a material whose main ingredient is a material of a perovskite type crystal structure not including lead, such as barium titanate ( $\text{BaTiO}_3$ ) where barium zirconate ( $\text{BaZrO}_3$ ) is dissolved, is used as the piezoelectric material.

The barium titanate where barium zirconate is dissolved has an electrical-mechanical coupling coefficient of 0.5, similar with PZT's electrical-mechanical coupling coefficient. Furthermore, the barium titanate where barium zirconate is dissolved has the perovskite type crystal structure and therefore it is possible to obtain a good piezoelectric property such as small crystal anisotropy.

Since the Curie temperature of the barium

titanate where barium zirconate is dissolved is low (approximately 130 °C), an electric connection is to be made by the anisotropic conductive film whereby the electric connection can be made at a lower  
5 temperature than soldering. The connection can be made by other methods such as wire bonding.

In this embodiment, the barium titanate where barium zirconate is dissolved is used. However, barium titanate where a slight amount of Fe or K is  
10 included may be used.

Thus, since lead is not included at all in the piezoelectric element as the actuator means in the liquid drop discharge head, it is possible to make the environmental pollution risk low and make  
15 the dismantling cost low.

Next, the second embodiment of the liquid drop discharge head of the present invention is discussed. Since the structure of the second embodiment is the same as the first embodiment, an  
20 explanation of the structure of the second embodiment is omitted.

In the second embodiment, a ceramic whose main ingredient is potassium niobate ( $\text{KNbO}_3$ ) that is a material having a perovskite type crystal structure  
25 not including lead is used as a piezoelectric

material (piezoelectric ceramic) of the piezoelectric element 4.

The ceramic whose main ingredient is potassium niobate has an electrical-mechanical coupling coefficient of 0.5, similar with PZT's electrical-mechanical coupling coefficient. Furthermore, the ceramic whose main ingredient is potassium niobate has the perovskite type crystal structure and therefore it is possible to obtain a good piezoelectric property such as small crystal anisotropy. Since the Curie temperature of the ceramic whose main ingredient is potassium niobate is high (approximately 435 °C), it is possible to mount the FPC by soldering as well as the PZT.

Thus, in the second embodiment as well as the first embodiment, since lead is not included at all in the piezoelectric element as the actuator means in the liquid drop discharge head, it is possible to make the environmental pollution risk low and make the dismantling cost low.

Next, the third embodiment of the liquid drop discharge head of the present invention is discussed. Since the structure of the third embodiment is the same as the first embodiment, an explanation of the structure of the third embodiment

is omitted.

In the third embodiment, a ceramic whose main ingredient is bismuth sodium titanate ( $(\text{Bi}_{0.5}\text{Na}_{0.5})\text{TiO}_3$ ) that is a material having a perovskite type crystal structure not including lead is used as a piezoelectric material (piezoelectric ceramic) of the piezoelectric element 4.

Since a sintering temperature of the ceramic whose main ingredient is bismuth sodium titanate is equal to or less than  $1200^\circ\text{C}$ , it is possible to reduce the amount of the palladium, an extremely expensive metal, in the internal layer electrode, so that it is possible to manufacture the piezoelectric element 4 at low cost.

Thus, in the third embodiment as well as the first and second embodiments, since lead is not included at all in the piezoelectric element as the actuator means in the liquid drop discharge head, it is possible to make the environmental pollution risk low and make the dismantling cost low.

Next, the fourth embodiment of the liquid drop discharge head of the present invention is discussed. Since the structure of the fourth embodiment is the same as the first embodiment, an explanation of the structure of the fourth embodiment

is omitted.

In the fourth embodiment, a ceramic whose main ingredient is nickel sodium titanate

( $\text{BBi}(\text{Ni}_{0.5}\text{Ti}_{0.5})\text{O}_3$ ) that is a material having a

5 perovskite type crystal structure not including lead is used as a piezoelectric material (piezoelectric ceramic) of the piezoelectric element 4.

Since the Curie temperature of the ceramic whose main ingredient is nickel sodium titanate is

10 relatively high (approximately  $250^\circ\text{C}$ ), it is possible to mount the FPC by soldering as well as the PZT.

Thus, in the fourth embodiment as well as the above-discussed embodiments, since lead is not included at all in the piezoelectric element as the

15 actuator means in the liquid drop discharge head, it is possible to make the environmental pollution risk low and make the dismantling cost low.

Next, the fifth embodiment of the liquid drop discharge head of the present invention is

20 discussed. Since the structure of the fifth embodiment is the same as the first embodiment, an explanation of the structure of the fifth embodiment is omitted.

In the fifth embodiment, a ceramic whose

25 main ingredient is  $\text{Ba}_2\text{NaNb}_5\text{O}_{15}$  that is a material

having a tungsten bronze type crystal structure is used as a piezoelectric material (piezoelectric ceramic) of the piezoelectric element 4.

In a material group whose main ingredient is  
5  $\text{Ba}_2\text{NaNb}_5\text{O}_{15}$  that is the material having the tungsten bronze type crystal structure, a piezoelectric strain  $d_{33}$  coefficient is large (250 pC/N) and therefore it is possible to drive the material at a low voltage. Hence, it is possible to reduce the cost for a  
10 driving circuit and form an image forming device having high functions at a low cost.

Thus, in the fifth embodiment as well as the above-discussed embodiments, since lead is not included at all in the piezoelectric element as the  
15 actuator means in the liquid drop discharge head, it is possible to make the environmental pollution risk low and make the dismantling cost low.

Next, the sixth embodiment of the liquid drop discharge head of the present invention is  
20 discussed. Since the structure of the sixth embodiment is the same as the first embodiment, an explanation of the structure of the sixth embodiment is omitted.

In the sixth embodiment, a ceramic whose  
25 main ingredient is  $\text{Bi}_4\text{Ti}_3\text{O}_{12}$ , which is a material of a



bismuth layered compound, is used as the piezoelectric material (piezoelectric ceramic) of the piezoelectric element 4.

In a material group whose main ingredient is  $\text{Bi}_4\text{Ti}_3\text{O}_{12}$  that is a material having a bismuth layered compound, a piezoelectric strain  $d_{33}$  coefficient is relatively large and therefore it is possible to drive the material at a low voltage. Hence, it is possible to reduce the cost for a driving circuit and form an image forming device having high functions at a low cost. Since alkali metal is not used as a composition element, it is possible to obtain good composition controllability at the time of burning and therefore to obtain good mass production.

Thus, in the sixth embodiment as well as the above-discussed embodiments, since lead is not included at all in the piezoelectric element as the actuator means in the liquid drop discharge head, it is possible to make the environmental pollution risk low and make the dismantling cost low.

A material whose main ingredient has the perovskite type crystal structure not including lead is not limited to the above-discussed barium titanate, potassium niobate, bismuth sodium titanate, and nickel sodium titanate. Similarly, the material

-17-

having the tungsten bronze type crystal structure is not limited to above-discussed  $\text{Ba}_2\text{NaNb}_5\text{O}_{15}$ . Similarly, the material having the bismuth layered compound type crystal structure is not limited to the above-

5 discussed  $\text{Bi}_4\text{Ti}_3\text{O}_{12}$ .

In addition, the present invention can be applied to not only the above-discussed head using the stacked layer type piezoelectric element but also a head using a Bimorph type piezoelectric element.

10 Furthermore the present invention can also be applied to a head using the stacked layer type piezoelectric element wherein a deformation in a d33 direction or d31 direction is used.

Next, an inkjet recording device as an image  
15 forming device of the present invention as a liquid discharge device having a liquid drop discharge head of the present invention is discussed with reference to FIG. 6 and FIG. 7. Here, FIG. 6 is a structural view showing an example of a mechanism part of the  
20 image forming device including the liquid drop discharge device of the present invention. FIG. 7 is a plan view of parts of the image forming device of the present invention.

In the image forming device, a carriage 103  
25 is held by a guide rod 101 and a stay 102 which are

-18-

guide members bridging between left and right side plates (not shown), so as to be capable of being slid in a main scan direction. A timing belt is provided at the carriage 103 and between a pulley 106a

5 provided at a main scanning motor 104 and a pulley 106b provided at the other side. The carriage 103 is moved and caused to scan via the timing belt 105 by the main scanning motor 104 in the carriage main scan direction as shown in FIG. 7. In the carriage 103,

10 an ink jet recording head 107 is provided in a direction in which plural ink jet opening parts are cross the main scanning direction. The recording head 107 is also provided so that the ink drop jet direction is downward. The four ink jet recording

15 heads 107 respectively jet ink drops having colors of yellow(Y), cyan(C), magenta(M), and black(Bk).

Furthermore, sub tanks 108 for colors are provided at the carriage 103 so that corresponding ink colors are provided to the recording heads 107.

20 Supplemental ink is supplied from a main tank, namely an ink cartridge, to the sub tank 108 via the ink supply tube (not shown).

Furthermore, as a paper feeding part for feeding paper 112 (including not only paper per se

25 but also OHP (Overhead Projector) film, and means a

material where an image is formed) stacked on a paper stacking part (pressure plate) 111 of the paper feeding tray 110, a half circle roller (paper feeding roller) 113 and a separation pad 114 are provided.

5 One sheet of the paper 112 is separately fed from the paper stacking part 111 by the half circle roller 113. The separation pad 114 made of material having a large coefficient of friction faces the half circle roller (paper feeding roller) 113 and is energized to  
10 a side of the half circle roller 113.

As a conveyance part for conveying the paper 112 fed from the paper feeding part at a lower side of the recoding heads 107, a conveyance belt 121, a counter roller 122, a conveyance guide 123, and a  
15 head end pressuring roller 125 are provided. The conveyance belt 121 electrostatically attaches and conveys the paper 112. The paper 112 sent from the paper feeding part via the guide 115 is put between the conveyance belt 121 and the counter roller 122 so  
20 as to be conveyed. By the conveyance guide 123, the paper 112 is sent in the upward direction, is then turned substantially 90 degrees, and then the paper 112 is conveyed on the conveyance belt 121. The head end pressuring roller 125 is pushed to a side of the  
25 conveyance belt 121 by a pressing member 124. In

addition, a charging roller 126 is provided as charging means for charging a surface of the conveyance belt 121. The conveyance belt 121 is an endless belt. The conveyance belt 121 is hung  
5 between the conveyance roller 127 and a tension roller 128. The conveyance belt 121 revolves in a belt conveyance direction, namely a sub scanning direction, by rotating the conveyance roller 127 via the timing belt 132 and the timing roller 133 by the  
10 sub scanning motor 131.

The conveyance belt 121 has a surface layer and a back surface layer. The surface layer 121a (not shown) functions as a paper attraction surface formed by, for example, a pure resin material which  
15 has a thickness of approximately 40  $\mu\text{m}$  and whose resistance is not controlled, such as ETFE (Ethylene Tetrafluoroethylene) pure material. The back surface, such as a middle resistance layer or an earth layer, is made of the same material as the surface layer.  
20 The resistance of the back surface layer is controlled by carbon content.

The charging roller 126 comes in contact with the surface layer of the conveyance belt 121 and rotates as following the rotation of the conveyance  
25 belt 121. The charging roller 126 gives 2.5 N to

both ends of the shaft as pressurizing forces. The conveyance roller 127 works as a ground roller so as to contact a middle resistance layer (back layer) of the conveyance belt 121 for grounding.

5           A guide member 136 is arranged at a back side of the conveyance belt 121 as corresponding to a printing area by the recording heads 107. An upper surface of the guide member 136 projects to a side of the recording heads 107 more than a tangent of two  
10   rollers (the conveyance roller 127 and the tension roller 128) supporting the conveyance belt 121. Under this structure, in the printing area, the conveyance belt 121 is pushed by the upper surface of the guide member 136 so as to be guided.

15           Furthermore, as a paper discharging part for discharging the paper 112 recorded on by the recording heads 107, a separation claw for separating the paper 112 from the conveyance belt 121, a  
discharging roller 142, and a discharging roller 143  
20   are provided. The paper discharging tray 144 is provided for holding the discharged papers 112. A both-surfaces paper feeding unit 151 is detachably arranged at a back surface part of the device main part. The both-surfaces paper feeding unit 151 takes  
25   in the paper 112 returned by reverse direction

revolution of the conveyance belt 121 and turns the paper 112 over so as to feed the paper 112 again between the counter roller 122 and the conveyance belt 121.

5                   In the ink jet recording device having the above-discussed structure, one sheet of the paper 112 is separately fed from the feeding part. The paper 112 fed upward in a substantially vertical direction is guided by the guide 115. The paper 112 is put  
10 between the conveyance belt 121 and the counter roller 122 so as to be conveyed. Furthermore, a head end part of the paper 112 is guided by the conveyance guide 123 and pushed to the conveyance belt 121 by the head end pressure roller 125 so that the  
15 direction of the paper 112 is changed substantially 90 degrees.

                  At this time, by a control circuit (not shown in the drawings), a voltage is applied from a high voltage electric power supply to the charging  
20 roller 126 so that a positive output and a negative output repeat by turns. As a result of this, a charging voltage pattern is formed on the conveyance belt 121. That is, positive and negative charging is performed in a belt shape with a designated width in  
25 the sub scanning direction that is a revolution

direction. The paper 112 is fed on the conveyance belt 121 positively and negatively charged by turns so that the paper 112 is adhered by the conveyance belt 121 electrostatically and the paper 112 is  
5 conveyed in the sub scanning direction by the revolving movement of the conveyance belt 121.

While the carriage 103 is moved, the recording heads 107 are driven corresponding to an image signal so that ink drops are jetted onto the  
10 paper 112 which is stopped and one line is recorded. After the paper 112 is conveyed with a designated distance, the next line is recorded. The recording process is terminated based on receipt of a recording finishing signal or a signal indicated the rear end  
15 of the paper 112 has arrived at the recording area, so that the paper 112 is discharged to the paper discharging tray 144.

Thus, since the image forming device has the liquid drop discharge head of the present invention,  
20 lead ingredients are not included in the head. Hence, even if the image forming device is thrown away, it is possible to prevent the lead ingredients from diffusing, furthermore costs for collecting and dismantling the image forming device can be low, and  
25 the image forming device can be reused easily.



The present invention is not limited to the above-discussed embodiments, but variations and modifications may be made without departing from the scope of the present invention.

5           For example, the inkjet recording device, one of examples of the image forming devices, is discussed as a liquid drop discharge device. However, the present invention is not limited to this. Various kinds of sheets, the OHP sheet, a plastic  
10 material such as a compact disk or a plastic material used for a decoration plate, a fabric, a metal material such as aluminum or copper, a leather material such as a cattle skin, a pig skin, or artificial leather, wood material such as a wood or  
15 wood plate, a bamboo material, a ceramic material such as a tile, a three dimensional structural body such as a sponge, or the like can be used as a recording medium where the liquid is such as the ink.

          Furthermore, a printer device for recording  
20 on the various kinds of sheets or the OHP sheet, a recording device for recording on the plastic material such as the compact disk, a recording device for recording on the metal plate, a recording device for recording on the leather material, a recording  
25 device for recording on the wood, a recording device

for recording on the ceramic material, a recording device for recording on the three dimensional structural body such as a sponge, a printing device for recording on the fabric, or the like, can be used  
5 as the liquid drop discharge device.

-26-

## CLAIMS

1. A liquid drop discharge head, comprising:  
a nozzle configured to discharge a liquid  
5 drop by using a piezoelectric element;  
wherein lead ingredients are not included in  
the piezoelectric element.

2. The liquid drop discharge head as claimed  
10 in claim 1,  
wherein main ingredients of the  
piezoelectric element are materials having a  
perovskite type crystal structure not including lead.

3. The liquid drop discharge head as claimed  
15 in claim 2,  
wherein main ingredients of the  
piezoelectric element are barium titanate.

4. The liquid drop discharge head as claimed  
20 in claim 2,  
wherein main ingredients of the  
piezoelectric element are potassium niobate.

5. The liquid drop discharge head as claimed  
25

-27-

in claim 2,

wherein main ingredients of the piezoelectric element are bismuth sodium titanate.

5                   6. The liquid drop discharge head as claimed in claim 2,

wherein main ingredients of the piezoelectric element are nickel sodium titanate.

10                   7. The liquid drop discharge head as claimed in claim 1,

wherein main ingredients of the piezoelectric element are materials having a tungsten bronze type crystal structure.

15

8. The liquid drop discharge head as claimed in claim 7,

wherein main ingredients of the piezoelectric element are  $\text{Ba}_2\text{NaNb}_5\text{O}_{15}$ .

20

9. The liquid drop discharge head as claimed in claim 1,

wherein main ingredients of the piezoelectric element are materials having a bismuth  
25 layered compound.

10. The liquid drop discharge head as  
claimed in claim 9,

wherein main ingredients of the  
5 piezoelectric element are  $\text{Bi}_4\text{Ti}_3\text{O}_{12}$ .

11. A liquid drop discharge device,  
comprising:

a liquid drop discharge head configured to  
10 discharge a liquid drop;

wherein the liquid drop discharge head  
includes a nozzle configured to discharge the liquid  
drop by using a piezoelectric element, and

lead ingredients are not included in the  
15 piezoelectric element.

12. An image forming device configured to  
form an image on a recording medium by discharging a  
liquid drop of recording liquid, comprising:

20 a liquid drop discharge head configured to  
discharge the liquid drop;

wherein the liquid drop discharge head  
includes a nozzle configured to discharge the liquid  
drop by using a piezoelectric element, and

25 lead ingredients are not included in the

piezoelectric element.

5

10

15

20

25

1/5

FIG.1



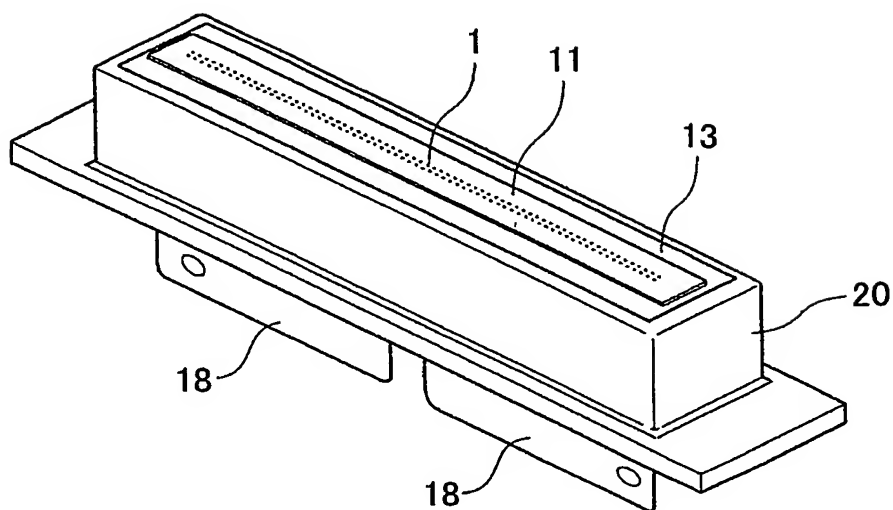


FIG.2

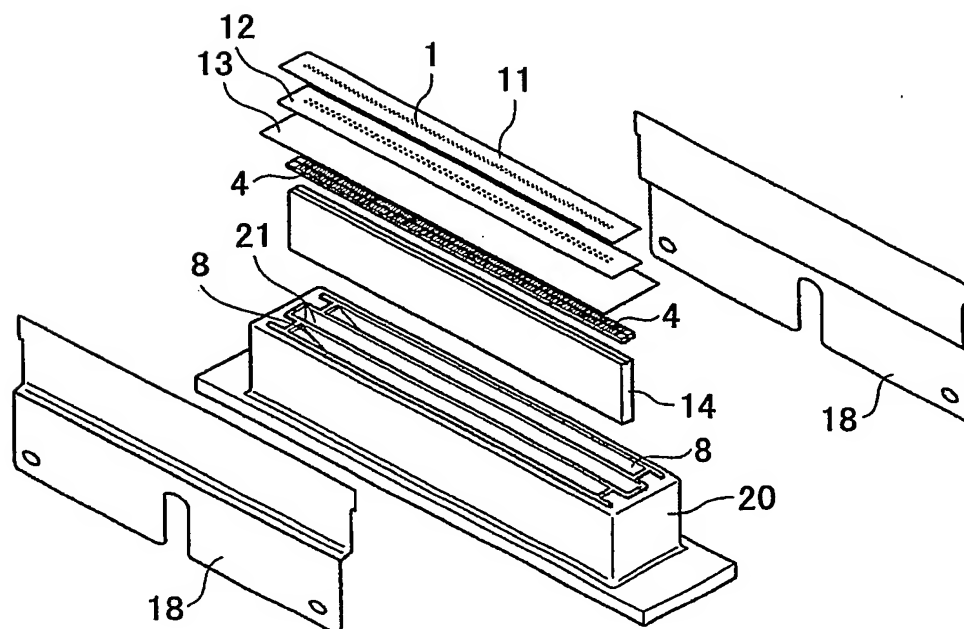

2/5

FIG.3

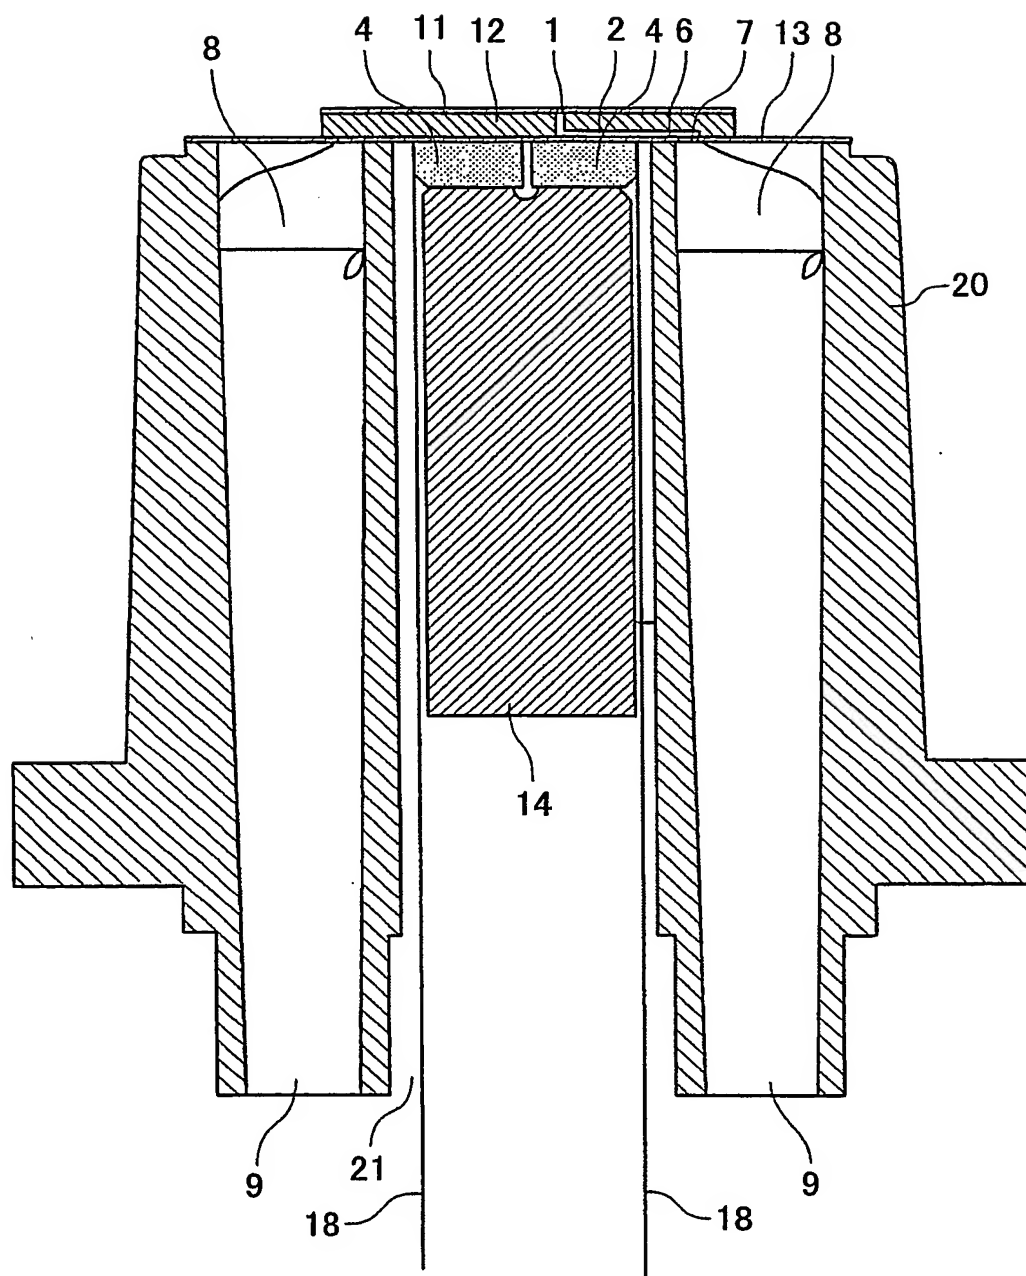



3/5

FIG.4

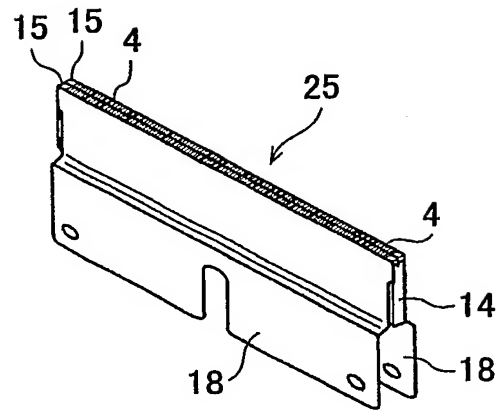


FIG.5

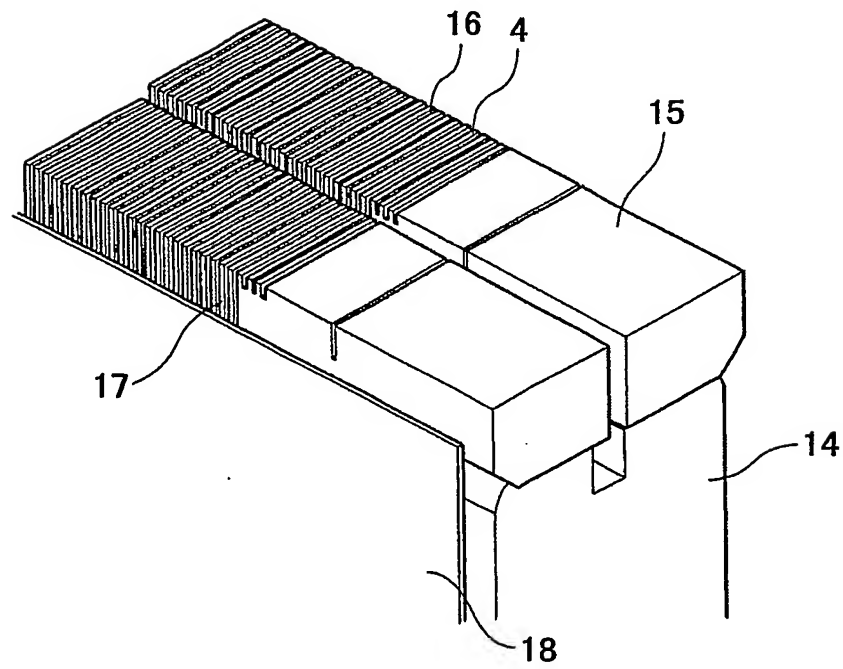


FIG.6


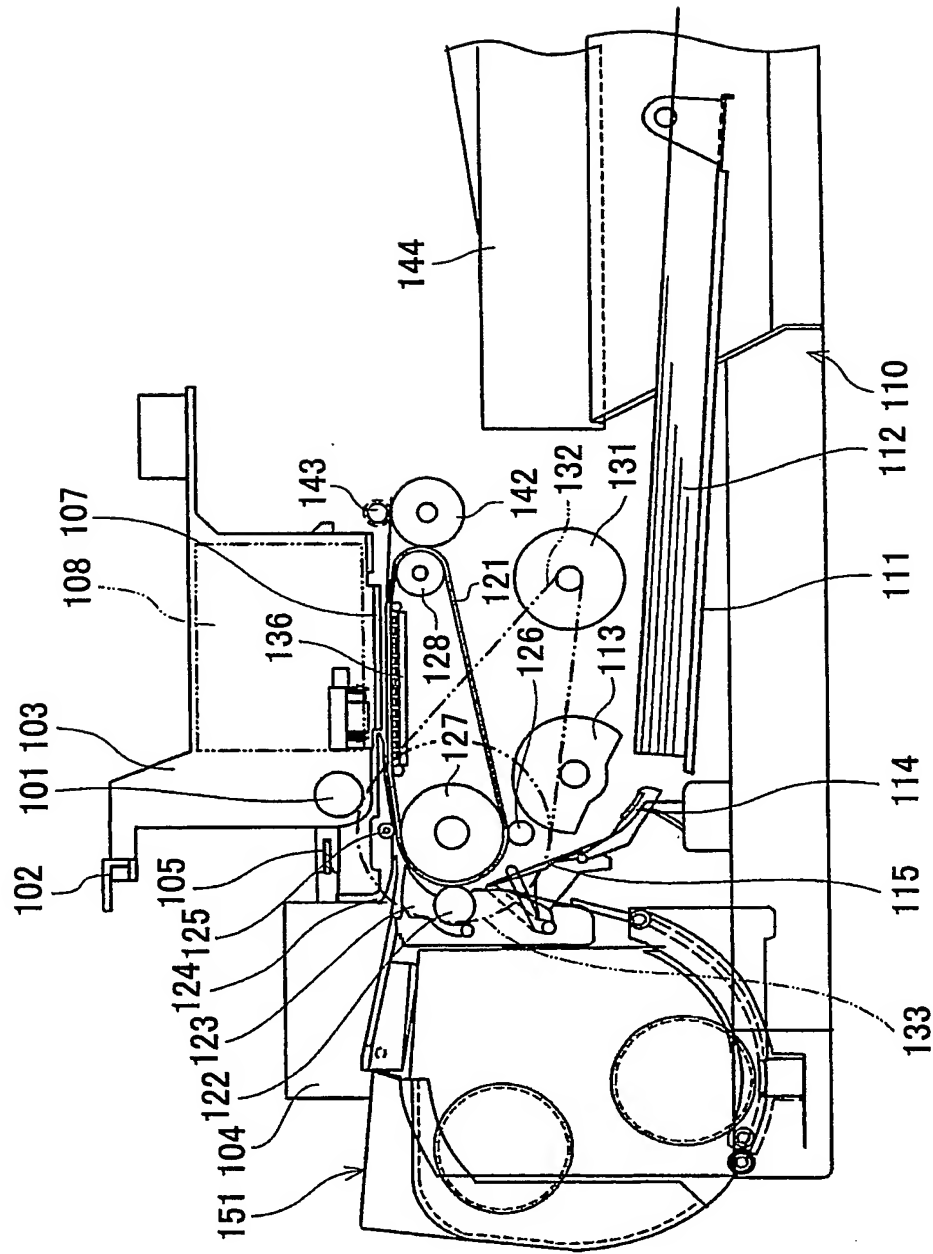


FIG. 7

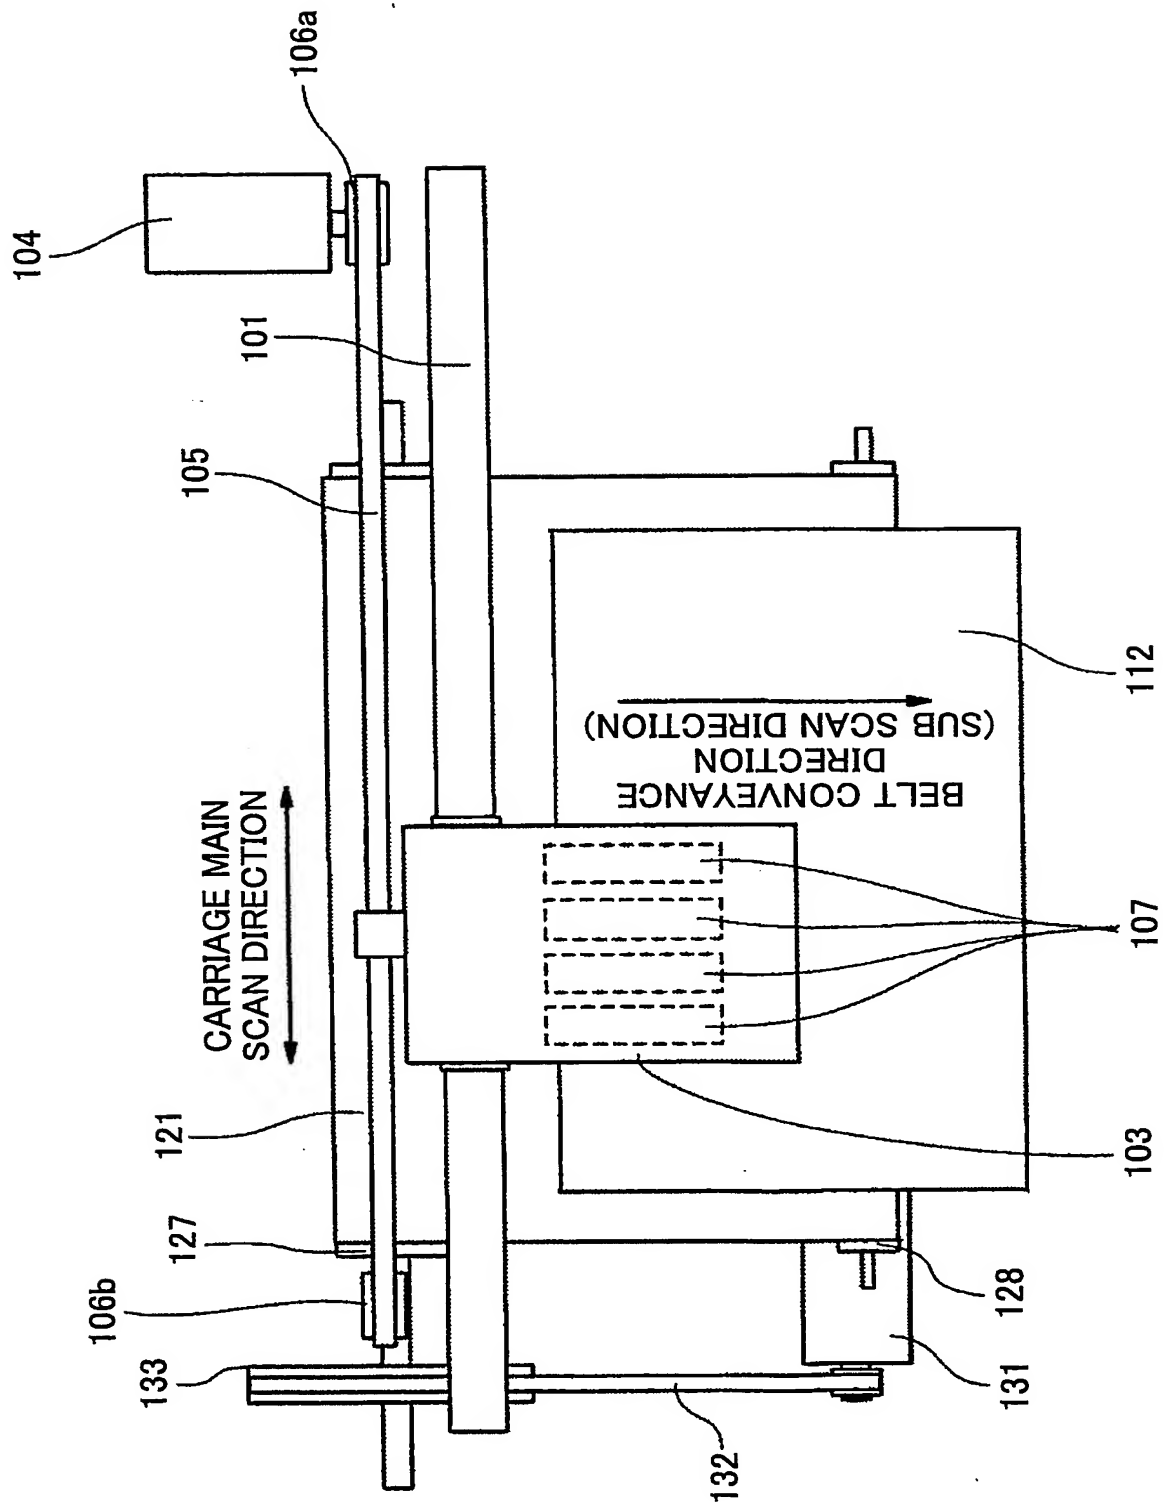

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2005/003443

## A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl<sup>7</sup> B41J 2/045, 2/055, H01L 41/09

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl<sup>7</sup> B41J 2/045, 2/055, H01L 41/09

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Japanese Utility Model Gazette 1922-1996, Japanese Publication of Unexamined Utility Model Applications 1971-2005, Japanese Registered Utility Model Gazette 1994-2005, Japanese Gazette Containing the Utility Model 1996-2005

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	JP 2003-309302 A (CANON KABUSHIKI KAISHA) 31.10.2003, column 5 line 31 - column 6 line 7, (Family: None)	1-4, 11, 12 5-10
Y	JP 2001-151566 A (NIHON TOKUSHU TOGYO KABUSHIKI KAISHA) 05.06.2001, column 2 line 5-10 & US 2003/001131 A1	5
Y	JP 2002-265262 A (TDK KABUSHIKI KAISHA) 18.09.2002, column 4 line 33-41, (Family: None)	6
Y	JP 10-297969 A (KABUSHIKI KAISHA MURATA SEISAKUSHO) 10.11.1998, column 1 line 27-39, & EP 0875493 B1 & US 5954994 A	7, 8
Y	JP 2000-154054 A (MATSUSHITA DENKI SANGYO KABUSHIKI KAISHA) 06.06.2000, column 1 line 33-42, (Family: None)	9, 10

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

16.03.2005

Date of mailing of the international search report

05.04.2005

Name and mailing address of the ISA/JP

Japan Patent Office

3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan

Authorized officer

YUKIHIRO KIRIHATA

Telephone No. +81-3-3581-1101 Ext. 3221

2P

9606